



SA.26


Modello torcia	Lunghezza	V	I ₂ MAX 60 % ARGON	I ₂ MAX 100 % ARGON	V ₂	Ø	GAS	AIR
SA.26.4	4m	L	250	200	AC/DC x Al-AC	mm	1/1"	aria
SA.26.8	8m							
SA.26V.4	4m							
SA.26V.8	8m							

TORCE COMPLETE DI CONNESSIONE

Torcia con connessione EU

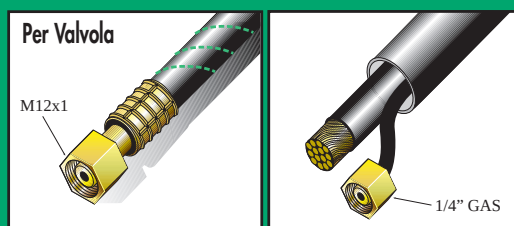


CODICE TORCIA COMPLETA

Modello torcia

SA.26.4	304.090.400
SA.26.8	304.090.800
SA.26F.4 (Flex)	308.090.400
SA.26F.8 (Flex)	308.090.800
SA.26A.4 (Diritta)	306.090.400
SA.26A.8 (Diritta)	306.090.800
SA.26V.4 (Valvola)	305.020.400
SA.26V.8 (Valvola)	305.020.800
SA.26VF.4 (Valv. Flex)	309.020.400
SA.26VF.8 (Valv. Flex)	309.020.800

Torcia con connessione D 35/50 mm²

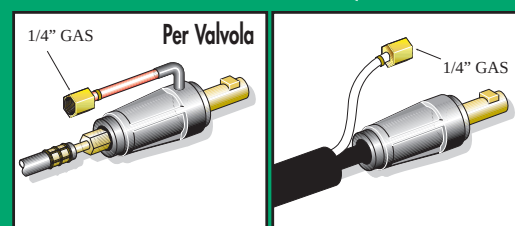


CODICE TORCIA COMPLETA

304.090.401
304.090.801
308.090.401
308.090.801
306.090.401
306.090.801
305.020.401
305.020.801
309.020.401
309.020.801

TORCE RAFFREDDATE AD ARIA


RICAMBI

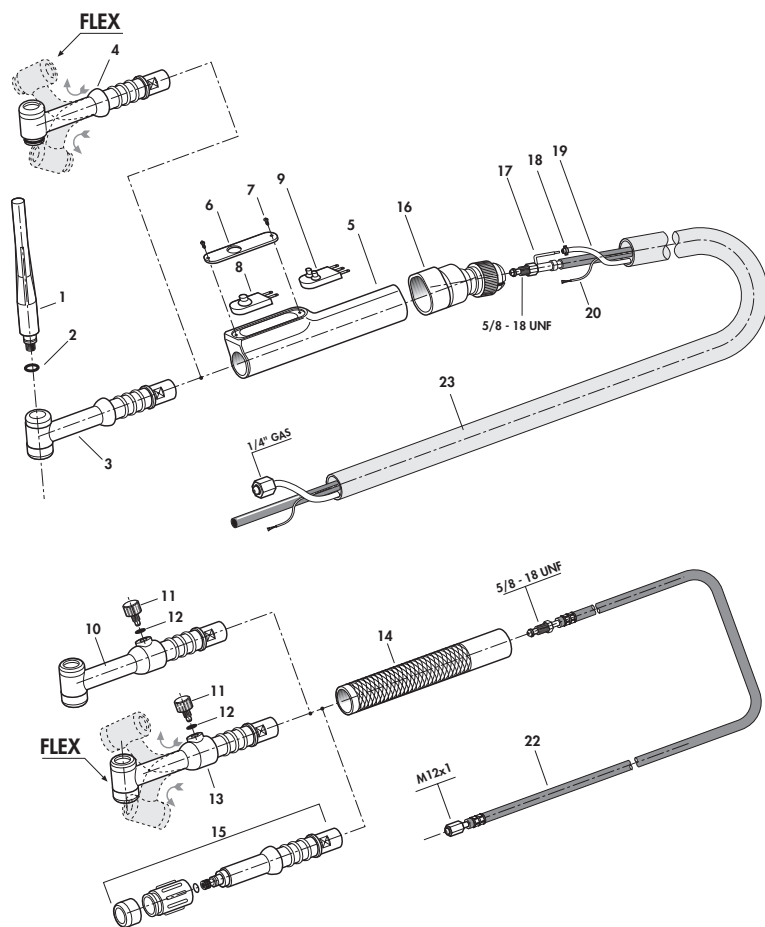

Pos.	Descrizione	Codice	Conf.
1	Cappello lungo con "O" ring	321.102.101	5
2	Guarnizione "O" ring 2037	101.102.111	10
3	Corpo torcia	316.103.502	1
4	Corpo torcia flessibile	316.107.502	1
5	Impugnatura completa per micro	337.100.104	1
6	Coprimicro	315.101.101	1
7	Vite impugnatura	181.104.102	50
8	Micro - sottogomma	339.101.101	1
9	Micro ON-OFF	339.101.102	5
10	Corpo torcia con valvola	316.105.102	1
11	Valvola con "O" ring	330.101.102	1
12	Guarnizione con "O" ring	101.102.112	10
13	Corpo torcia flessibile con valvola	316.108.502	61
14	Impugnatura senza micro	337.102.102	1
15	Corpo torcia Diritto	316.106.502	1
16	Snodo	356.102.202	1
17	Cavo portacorrente mt. 4	325.010.403	1
17	Cavo portacorrente mt.8	325.010.803	1
18	Anello stringitubo Ø 8.7	101.106.101	10
19	Tubo passaggio gas	166.080.050	1
20	Cavo comandi a mt.	143.101.102	1
22	Monocavo mt.4 M. 12 x 1	324.030.401	1
22	Monocavo mt.8 M. 12 x 1	324.030.801	1
23	Protezione in tela "TUBIX" a mt.	175.002.285	1

Le torce vengono fornite senza ugello ceramico, pinza, portapinza ed elettrodo tungsteno.


Torcia con connessione MK



CODICE TORCIA COMPLETA

304.090.403
304.090.803
308.090.403
308.090.803
306.090.403
306.090.803

Torcia con connessione UK




CODICE TORCIA COMPLETA

304.090.404
304.090.804
308.090.404
308.090.804

305.020.404
305.020.804
309.020.404
309.020.804

Torcia con connessione USA-1




CODICE TORCIA COMPLETA

304.090.405
304.090.805
308.090.405
308.090.805

305.020.405
305.020.805
309.020.405
309.020.805

Torcia con connessione USA-2



CODICE TORCIA COMPLETA

304.090.406
304.090.806
308.090.406
308.090.806

305.020.406
305.020.806
309.020.406
309.020.806

SA.26

TORCE RAFFREDDATE AD ARIA