


**PARANCHI
ELETTRICI
A CATENA
SERIE KF**

TIPO KF/1G
con gancio di sospensione

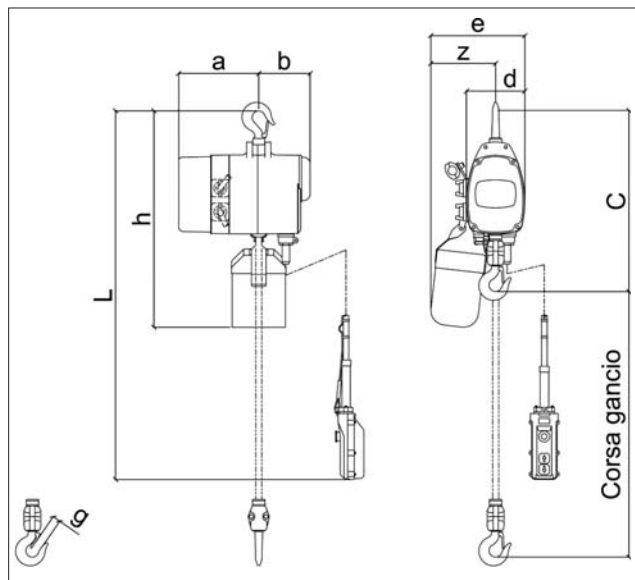

DATI TECNICI

	Portata	Tipo	Corsa gancio STD	Cavo pulsantiera STD L	Velocità sollevamento	Potenza motore sollevamento	R.I.	Tiri catena	Carico di prova	Peso netto
	(kg)		(m)	(m)	(m/min.)	(kW)	(%)	(N°)	(kg)	(kg)
1 vel. sollev.	125	KF 12S1/1G	3	2	10	0.3	50	1	156	26
	250	KF 12S2/1G	3	2	5	0.3	50	2	313	29
	250	KF 25S1/1G	3	2	8	0.45	50	1	313	28
	500	KF 25S2/1G	3	2	4	0.45	50	2	625	32
	500	KF 50S1/1G	3	2	7	0.8	50	1	625	41
	1000	KF 50S2/1G	3	2	3.5	0.8	50	2	1250	46
	1000	KF 100S1/1G	3	2	6.5	1.5	50	1	1250	56
	2000	KF 100S2/1G	3	2	3.3	1.5	50	2	2500	62
2 vel. sollev.	125	KF 12S1A/1G	3	2	10/3.3	0.3/0.1	40/40	1	156	26
	250	KF 12S2A/1G	3	2	5/1.7	0.3/0.1	40/40	2	313	29
	250	KF 25S1A/1G	3	2	8/2.7	0.45/0.15	40/40	1	313	28
	500	KF 25S2A/1G	3	2	4/1.3	0.45/0.15	40/40	2	625	32
	500	KF 50S1A/1G	3	2	7/2.3	0.8/0.27	40/40	1	625	41
	1000	KF 50S2A/1G	3	2	3.5/1.2	0.8/0.27	40/40	2	1250	46
	1000	KF 100S1A/1G	3	2	6.5/2.2	1.5/0.5	40/40	1	1250	57
	2000	KF 100S2A/1G	3	2	3.3/1.1	1.5/0.5	40/40	2	2500	63

Su richiesta sono possibili corse gancio superiori. - Tutti i modelli sono disponibili con comando diretto o con comando in bassa tensione incorporato.

DIMENSIONI

	Portata	Tipo	C	a	b	d	e	g	h	z
	(kg)		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
1 vel. sollev.	125	KF 12S1/1G	490	143 (218)	140	157	260 [270]	24	590 [680]	182 [192]
	250	KF 12S2/1G	525	143 (218)	140	157	260 [270]	24	590 [680]	182 [192]
	250	KF 25S1/1G	510	147 (241)	148	174	267 [277]	24	610 [700]	180 [190]
	500	KF 25S2/1G	550	147 (241)	148	174	267 [277]	24	610 [700]	180 [190]
	500	KF 50S1/1G	560	147 (224)	167	218	309 [384]	24	750 [830]	200 [275]
	1000	KF 50S2/1G	635	147 (224)	167	218	309 [384]	31	765 [845]	200 [275]
	1000	KF 100S1/1G	630	169 (253)	183	233	347 [412]	31	870 [610]	230 [295]
	2000	KF 100S2/1G	800	169 (253)	183	251	347 [412]	37	970 [1010]	230 [295]
2 vel. sollev.	125	KF 12S1A/1G	490	143 (218)	140	157	260 [270]	24	590 [680]	182 [192]
	250	KF 12S2A/1G	525	143 (218)	140	157	260 [270]	24	590 [680]	182 [192]
	250	KF 25S1A/1G	510	147 (241)	148	174	267 [277]	24	610 [700]	180 [190]
	500	KF 25S2A/1G	550	147 (241)	148	174	267 [277]	24	610 [700]	180 [190]
	500	KF 50S1A/1G	560	147 (224)	167	218	309 [384]	24	750 [830]	200 [275]
	1000	KF 50S2A/1G	635	147 (224)	167	218	309 [384]	31	765 [845]	200 [275]
	1000	KF 100S1A/1G	630	169 (253)	183	233	347 [412]	31	870 [610]	230 [295]
	2000	KF 100S2A/1G	800	169 (253)	183	251	347 [412]	37	970 [1010]	230 [295]

Le dimensioni possono essere variate dal costruttore senza preavviso. - Le dimensioni () della quota "a" sono per paranchi con comando in bassa tensione incorporata. - Le dimensioni [] delle quote "z" e "h" sono con sacco raccoglicatena grande.